

PRODUCT INFORMATION

REGUPOL EVERROLL IMPACT 16



Product:

A two-layer elastic floor covering made from PUR-bonded post-consumer SBR granule base mat and 100% EPDM wear layer

Areas of Application:

Fitness Sports & Leisure, Commercial, Retail and Education flooring

Features:

comfortable, robust, durable, sustainable, slip resistant

Standard Roll Dimensions:

Width: 1,250 mm

Natural: 12 mm underlay + 4 mm (40 lm)

Sealed: 12 mm underlay + 4 mm (20 lm)

Weight:

wear layer approx. 1.38 kg/m²/mm


base layer approx. 0.68 kg/m²/mm

Impact Resistance:

> 21 Nm based on EN 14904 / EN 1517

Force Reduction:

approx. 38% based on internal test EN 14904



Slip resistance:

AS 4586:2013 Slip resistance classification of new pedestrian surface materials, Appendix A – Wet Pendulum Test. Slip Certificate available on request.
Ultimate Natural: P4 Ultimate Sealed: P2

Colours:


22 standard colours.

Further technical data is available on request.




REGUPOL everroll ultimate

Available sealed or natural finish




Manila [1105]
4 mm




Osaka [1187]
4 mm




Lima [1113]
4 mm




Boston [1112]
4 mm




Seattle [1010]
4 mm



Galway [1009]
4 mm




Yuma [1030]
4 mm




Lagos [1008]
4 mm




Melbourne [1074]
4 mm




Amsterdam [1036]
4 mm




Jakarta [3003]
4 mm



Kýpros [3002]
4 mm




Oslo [1208]
4 mm




Paris [1085]
4 mm




Berlin [2005]
4 mm




Mons [3138]
4 mm




Pompeji [1194]
4 mm



Island [3000]
4 mm




Nome [2004]
4 mm



Helsinki [3001]
4 mm



Kush [2001]
4 mm




Goa [2000]
4 mm

All images are for illustration purposes only. Please request a product sample from your **REGUPOL** team before making a decision. The **REGUPOL everroll** rubber flooring is made from recycled materials, variations in the shading, EPDM and colour chip dispersion is normal.

We reserve the right to make changes to the technical data. The test results and specified values are subject to a tolerance of +/- 10 %. Crucial for the up-to-date data is the information on our homepage www.regupol.com.au

REGUPOL EVERROLL IMPACT 16

This system reflects a typical application with **REGUPOL everroll impact** floor coverings. For all other applications please contact the **REGUPOL** sports division. Please note that drawings are not to scale and are for illustration purposes only.

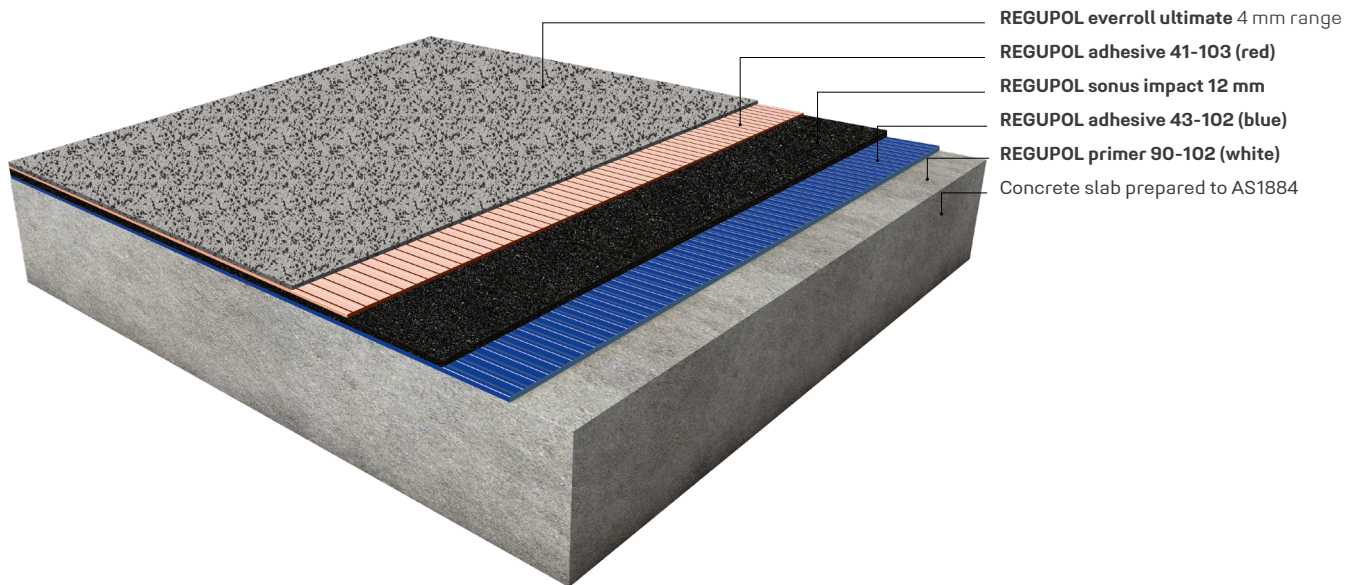

DISCLAIMER: The above information is given in good faith as a suggested guide in specifying REGUPOL everroll rubber flooring, no guarantee or warranty is expressed or implied. Any circumstances not covered by this guide should be referred to REGUPOL Australia Pty. Ltd. or its Distributors for any particular attention required. There are, however, many factors that may affect the outcome of projects using our products that are beyond our control. REGUPOL Australia Pty. Ltd. cannot be responsible for poor climate conditions, inadequate surface preparation, poor application techniques, not observing curing times, improper thinning of adhesives or any variable beyond our control. No liability is accepted by REGUPOL Australia Pty. Ltd., our employees, distributors, representatives or agents, for any loss or damage, direct or indirect, that may result from using the information and/or suggestions as actual conditions for use that are beyond our control. All materials should be checked/ tested for their suitability to the prevailing site conditions.